



Sheep Auto Drafter Ram Protector Kit

INSTALLATION GUIDE G05740

REQUIRED TOOLS

- Electric drill
- 1.5 - 3mm drill bit
- Pozi drive screw driver

SUPPLIED PARTS

- (6x) 8Gx1/2" screws
- Ram protector bracket

STEP 1




Disconnect air hoses (in roof of drafter unit) by pressing the blue ring on the end of each push-fitting then pull air tube from fitting. Note their original location for future reinstatement.

STEP 2




Temporarily place the ram protector bracket inside the roof of the drafter unit and mark the required hole positions on the plastic roof.

STEP 3

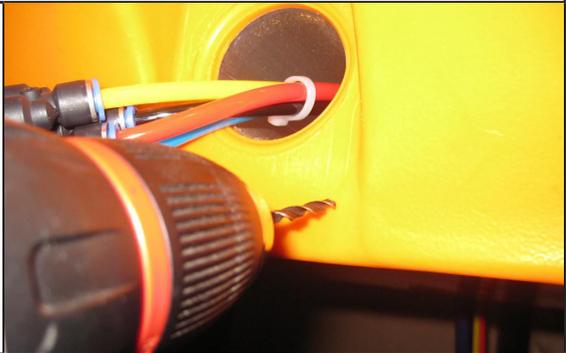

Remove bracket to drill holes with a recommended depth of 15mm.

STEP 4

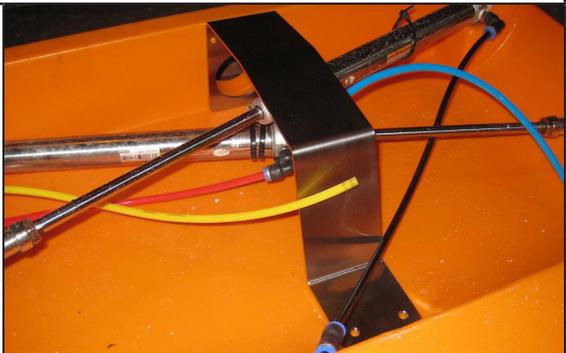

Replace ram protector bracket and insert the necessary screws.

STEP 5

Reconnect air hoses before using the sheep drafter unit.