



Gallagher

T15 Mounting Block

Installation Note 3E4484

T15 Mounting Block, Black: C300951

About your mounting block

The Gallagher T15 Mounting Block allows for surface mounted conduit to be fitted to the Gallagher T15 Reader, (e.g. if the reader is being installed on a thick concrete wall).

A conduit fitting may be installed on any of the mounting block's four sides.

The mounting block has been designed to accept four types/sizes of conduit fittings as listed in the table opposite. You will need to mark the correct location and drill the holes in the mounting block for the conduit fittings you plan to use. Deviation from the locations listed in the table may prevent the conduit from fitting and/or the reader from fitting in the mounting block.

Mounting block dimensions:

- Length 140 mm (5.5")
- Width 46 mm (1.8")
- Depth (with reader fitted) 61.5 mm (2.4")

Carton contents:

- 1 x Gallagher T15 Mounting Block
- 4 x 25 mm No.6 self tapping, pan head, Phillips drive fixing screws
- 4 x 40 mm No.6 self tapping, pan head, Phillips drive fixing screws


Installation

1. Position the mounting block on the mounting surface.
2. Using the mounting block as a guide, mark up to four fixing holes (using a pen or pencil).
3. Drill the fixing holes (counter bores) into the mounting surface.
4. Using the table below, mark the centre of the conduit fitting hole on the side of the mounting block. The hole centre is determined by the conduit size and nut type used (ring or flanged). The conduit should be flush with the mounting surface.
5. Drill the conduit fitting hole and fit the conduit to the mounting block.
6. Using the screws provided, secure the mounting block to the mounting surface. The mounting block should be flush with the mounting surface.
7. Connect the building cable to the reader tail. The reader bezel is not required.
8. Fit the reader into the mounting block, by clipping the reader lip into the top of the mounting block, and holding the top, press the bottom of the reader down into the mounting block.
9. Insert the M3 Torx Post Security screw (using a T10 Torx Post Security screwdriver) through the hole at the bottom of the mounting block to secure the reader.

Note: The Torx Post Security screw needs only to be lightly tightened.

Hole location

Conduit fitting type	Hole size required for conduit fitting	Hole centre distance from rear face	
		Using ring nut	Using flanged lock nut
M20 plastic plain/screwed adaptor	Ø20 mm	16 +/- 1 mm	18 +/- 1 mm
M25 plastic plain/screwed adaptor	Ø25 mm	20 +/- 1 mm	20 +/- 1 mm
1/2" steel connector with ring nut	Ø21 mm (Ø13/16")	18 +/- 1 mm (0.709 +/- 0.04")	Not compatible
3/4" steel connector with ring nut	Ø26 mm (Ø1")	20 +/- 1 mm (0.787 +/- 0.04")	Not compatible

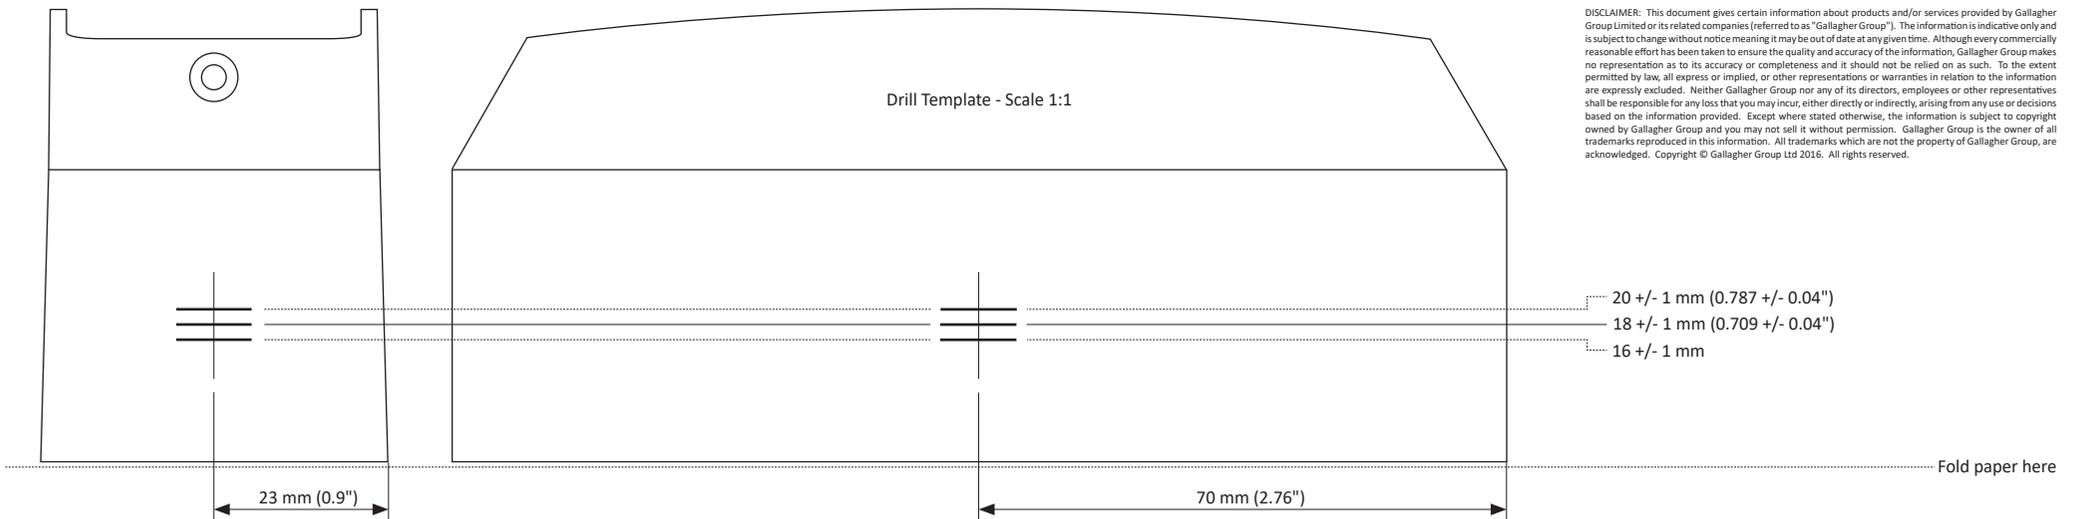

DISCLAIMER: This document gives certain information about products and/or services provided by Gallagher Group Limited or its related companies (referred to as "Gallagher Group"). The information is indicative only and is subject to change without notice meaning it may be out of date at any given time. Although every commercially reasonable effort has been taken to ensure the quality and accuracy of the information, Gallagher Group makes no representation as to its accuracy or completeness and it should not be relied on as such. To the extent permitted by law, all express or implied, or other representations or warranties in relation to the information are expressly excluded. Neither Gallagher Group nor any of its directors, employees or other representatives shall be responsible for any loss that you may incur, either directly or indirectly, arising from any use or decisions based on the information provided. Except where stated otherwise, the information is subject to copyright owned by Gallagher Group and you may not sell it without permission. Gallagher Group is the owner of all trademarks reproduced in this information. All trademarks which are not the property of Gallagher Group, are acknowledged. Copyright © Gallagher Group Ltd 2016. All rights reserved.